


NOTES

Transparency:


- On any facade that faces a Secondary Frontage, the first story shall have a transparency of 30% to 70% of the facade on the first floor and each upper story shall have a transparency of 15% to 60% of the facade. Any other facades that are visible from a public right of way, both the first story and upper stories shall have a minimum transparency of 40%.
- Frontages visible from public right of ways may be lined with commercial space that conforms to one of the applicable Building Typologies as set forth in the Regulating Plan.
- Vehicular entries to parking should occur on Secondary Private or Service Frontage. An entry may occur on an area of Primary Frontage, provided that the building is behind liner buildings of at least 10' in depth.
- For this typology, transparency requirements on facades that face a Secondary Frontage may be met utilizing double-pane insulated spandrel glass units.

ONE STORY BUILDINGS

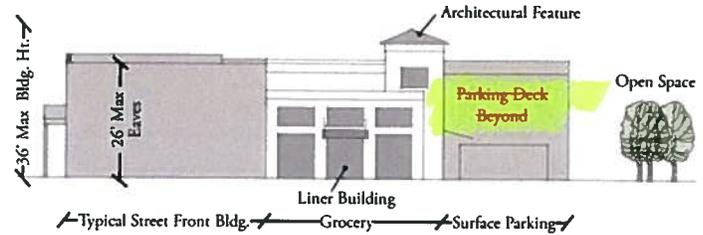

Pitched Roof Massing:

- One story buildings with a pitched roof shall have a maximum cornice/eaves height of 26'.
- Pitched roofs must not extend more than 10' above the eaves if the roof pitch is 5:12 to 13:12.
- Pitched roofs must not extend more than 16' above if the roof pitch is 14:12 to 20:12. Pitched roofs sloped greater than 20:12 will not be allowed.
- No building shall exceed 36' in height.
- Pitched roof structures may contain additional floor area which may be occupied without counting towards the story maximum for purposes of the Regulating Plan, provided any additional floor area is associated with and accessory to the floor area of the inferior story. In this condition, the maximum cornice height may be exceeded by 3', provided that a transparency of 15% to 45% is provided for the half story through the use of dormers.

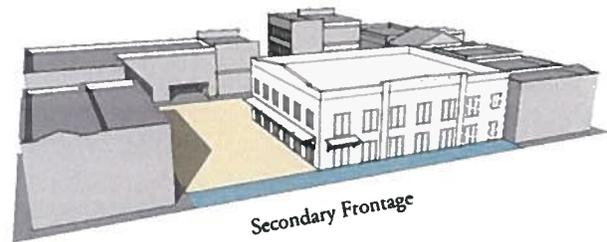



Flat Roof Massing:

- Parapets must extend a minimum of 3' above the top of the roof structure. This minimum height is intended to ensure that all rooftop equipment is hidden from public view.
- Parapets must occur within the maximum building height.
- Buildings or store spaces with a flat roof and parapet are not required to have a cornice/eaves line distinct from the top of the parapet.
- All rooftop equipment shall fall within the permissible roof heights, be located away from slopes or areas exposed to the public street, and otherwise be screened from view from adjacent public streets or be incorporated into the skin of the building or internal to the block.

Architectural Features:

- Buildings are limited to one story.
- Internal mezzanine floors are permitted within allowable ceiling height.
- Differentiated bays should be expressed on each facade of a building or store space that is over 60' wide and is directly fronting a public space or street.
- Bays shall be a minimum of 20' and a maximum of 30'; they must have architectural articulation, such as piers or pilasters.

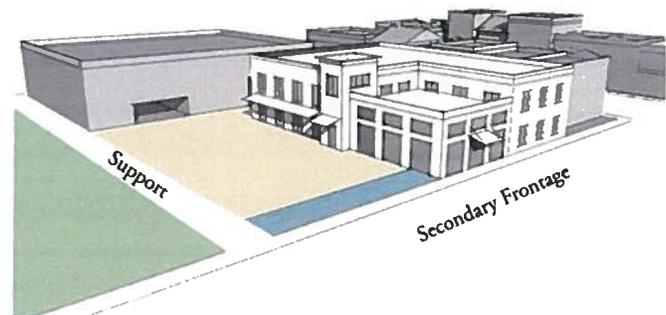

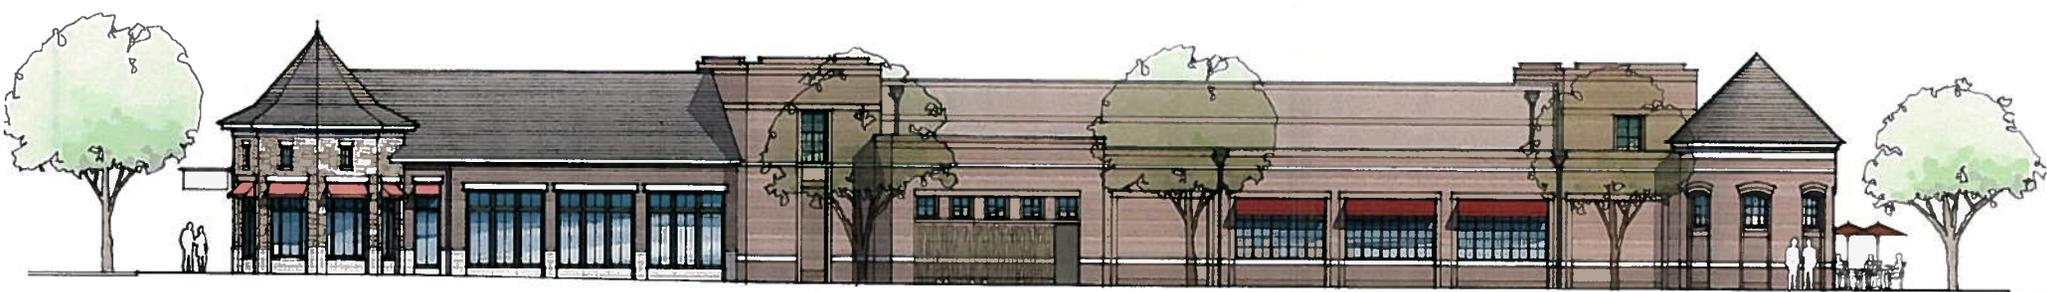

BUILDING A
SOUTH ELEVATION

